



# Lasertack

## New Laser Generation

MSL-FN-639/1~400mW



### SINGLE LONGITUDINAL MODE RED LASER AT 639nm

All solid state single longitudinal mode red laser at 639nm is made features of ultra compact, long lifetime, low cost and easy operating, which is used in DNA sequencing, flow cytometry, cell sorting, optical instrument, spectrum analysis, interference, measurement, holography, physics experiment, etc.

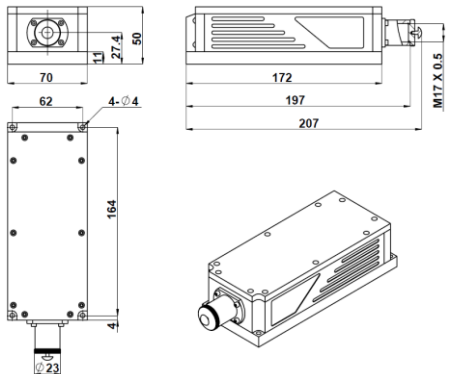
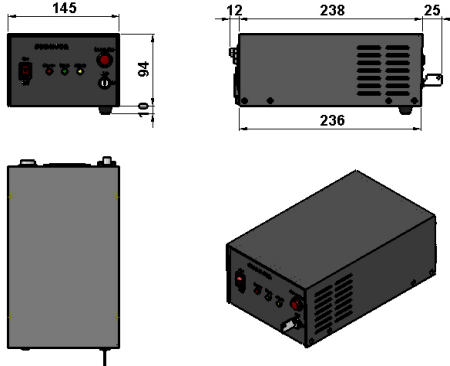


#### SPECIFICATIONS

Central wavelength (nm)	639±1
Operating mode	CW
Output power (mW)	>1, 5, 10, 20, ... , 400
Power stability (rms, over 4 hours)	<1%, <3%, <5%
Transverse mode	TEM <sub>00</sub>
Longitudinal mode	Single
Spectral linewidth (nm)	<0.0003
Coherent length (m)	>10
Noise of amplitude (rms, 1Hz~20MHz)	<1%, typical<0.5%
M <sup>2</sup> factor	<1.2
Beam diameter at the aperture (1/e <sup>2</sup> , mm)	<1.5
Beam divergence, full angle (mrad)	<1.5
Polarization ratio	>100:1, Horizontal±5 degree (Vertical Optional)
Warm-up time (minutes)	<10
Pointing stability after warm-up (mrad)	<0.05
Beam height from base plate (mm)	27.4
Operating temperature (°C)	15~35
Power supply (90-264VAC)	PSU-H-FDA
Expected lifetime (hours)	10000
Warranty	1 year



Note: The laser head needs to be used on a heat sink with good heat dissipation.

MXL-FN-639	PSU-H-FDA
 <p data-bbox="481 1460 750 1492">197(L)×70(W)×50(H) mm<sup>3</sup>, 2.0 kg</p>	 <p data-bbox="1400 1460 1691 1492">236(L) ×145(W) ×104(H) mm<sup>3</sup>, 2.3 kg</p>